


FEATURES

- Heavy-duty, brushed stainless steel exterior with enclosed liner, available in multiple widths.
- Internal or remote blower required.
- Welded seams, hemmed edges and hand-finished craftsmanship.
- Recessed easy-access controls.
- Infinite-speed blower control.
- Heat sentry to automatically turn unit on when heat is sensed and adjust blower speed.
- Halogen lighting with two settings.
- Removable, dishwasher-safe stainless steel baffle filters.
- Transition with backdraft damper.
- Horizontal discharge with accessory kit.

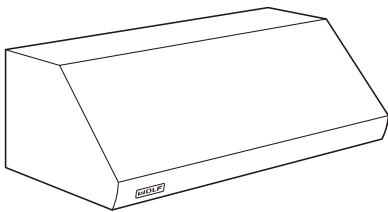

Model ICBPW482418

MODEL OPTIONS

36" Width	ICBPW362418
48" Width	ICBPW482418

BLOWER OPTIONS*

MODEL ICBPW362418		CMH
Internal		1014
Remote		1014
MODEL ICBPW482418		
Internal		1521
Remote		1521

*For make-up air restricted applications.

ACCESSORIES


- Internal and remote blowers (refer to chart).
- 97cm high stainless steel backsplash with or without warming racks.
- 15cm, 30cm, 46cm, 61cm and 76cm high stainless steel duct covers.
- Horizontal discharge kit.
- Make-up air damper.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

SPECIFICATIONS

PRODUCT	
Width	914mm, 1279mm
Height	457mm
Depth	610mm
Weight	30-57kg
DISCHARGE	
Vertical	254mm Round
ELECTRICAL	
Supply	220-240 VAC, 50/60 Hz
Load	6 amp
Connection	13 amp
INSTALLATION	
Bottom of Hood to Countertop	762-914mm

DIMENSIONS

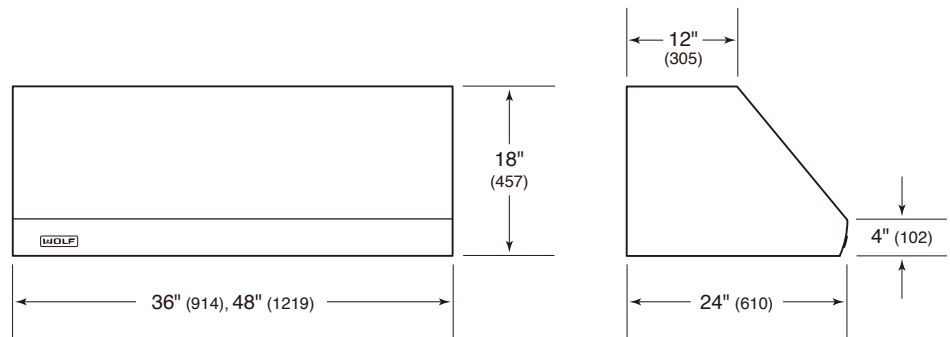


Pro ventilation hoods are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolfappliance.com.

Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.

Dimensions may vary $\pm 1/8"$ or 3mm. Dimensions in parentheses are millimeters unless otherwise specified.

ELECTRICAL LOCATION

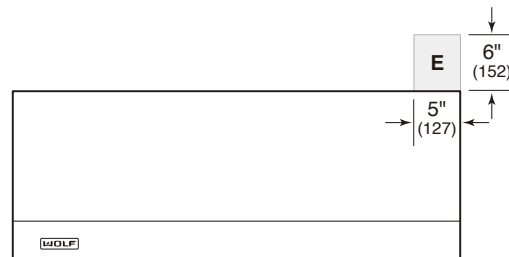

30" (762) TO 36" (914) BOTTOM EDGE TO COUNTERTOP